

4711 LJ Pkwy, Sugarland, Texas 77479 USA 

+1(346) 690-3350 

contact@emaflowcontrolusa.com 

www.emaflowcontrolusa.com 



CARBON STEEL SEAMLESS PIPE



Welded steel pipe

Welded steel pipe, also known as welded pipe, is a steel pipe made of...



ERW Piling Pipe

ASTM/ASME A252/SA252 steel piling pipe is a structural pipe ideally suite...



Galvanized ERW Steel Pipe

One of the most widely used materials on Earth, steel provides...



API 5L Pipeline

Welded steel pipes are used in oil and gas (oil and gas) industry pipeline...




ERW Building and Structural Steel Pipes

Used in construction sites, low-pressure liquid transportation, variou...



Anti-corrosion ERW Steel Pipe

Anti-corrosion steel pipes are used in petroleum, chemical, gas, heat,...

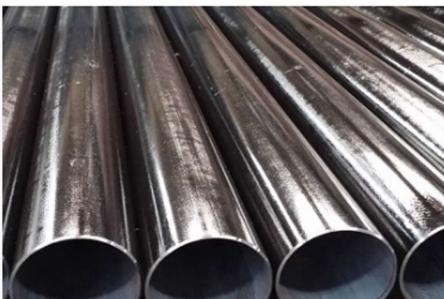

HFW steel pipe

HFW or high-frequency longitudinal-seam steel pipe is produced from...



A53 ERW STEEL PIPE

For High pressure and high temperature.



Piling Pipe

ASTM/ASME A252/SA252 steel piling pipe is a structural pipe ideally suite...



Construction & Structural Pipe

ERW Steel Pipe, Construction & Structural Steel Pipe




Water Pipeline

ERW (Electric Resistance Welded), HFI (High Frequency Induction), HFW...



Oil and gas pipeline

Oil and gas pipeline is an important pipeline system for transporting fluid..



Anti-corrosion SAW Steel Pipe

Three layer polyethylene anticorrosion is one of the main technical system ...



SAWL Piling Pipe

ASTM/ASME A252/SA252 steel piling pipe is a structural pipe ideally suite...



SAW Steel Pipe, LSAW & SAWL Construction & Structu

Used for construction field, low pressure liquid transportation, in...



API 5L Pipe Line, Oil & Gas Line Pipe, LSAW Steel

For conveying gas, water and oil, in the oil or natural gas industries




SAWL Steel Pipe

SAWL or Submerged Arc Welding Longitudinally steel pipe is a kind of...



Galvanized SAW Steel Pipe

One of the most widely used materials on Earth, steel provides...

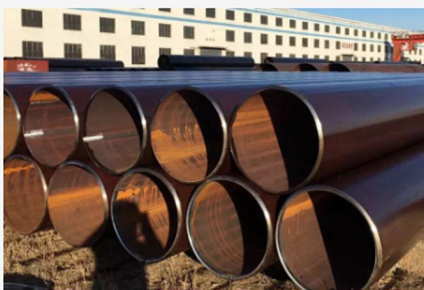

SAW (LSAW/SAWL) Steel Pipe

LSAW steel pipe is an ideal pipeline for large-scale pipeline engineering,...



Submerged arc welded steel pipe

Longitudinal Submerged Arc Welding is a specific welding technique used...



9.EN10219 SAWL Steel Pipe

Longitudinally Submerged Arc Welding is abbreviate as LSAW. LSA...



Piling Pipe-L

ASTM/ASME A252/SA252 steel piling pipe is a structural pipe ideally suite...




Construction & Structural Pipe-L

Used for construction field, low pressure liquid transportation, in...




Water Pipeline-L

By carrying out standard Non-Destructive Detections on our LSAW...

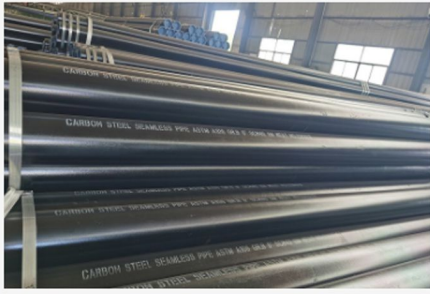


Tube for conveyance of fluid
For conveying oil,gas and other fluid.

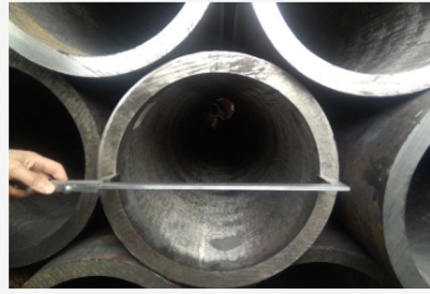


Seamless Steel Pipe for pressure purpose
It is available to manufacture pipeline, vessel,equipment,pipe fittings and...




High pressure and temperature Alloy Seamless Steel
Suitable for high pressure and high temperature applications.

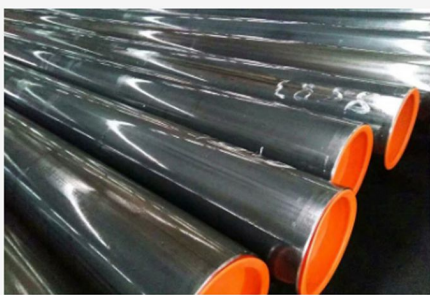

API 5L Line Pipe (Seamless)

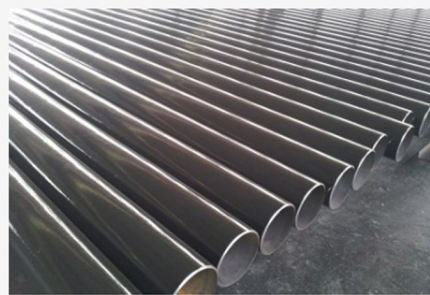

Structural Steel Pipe

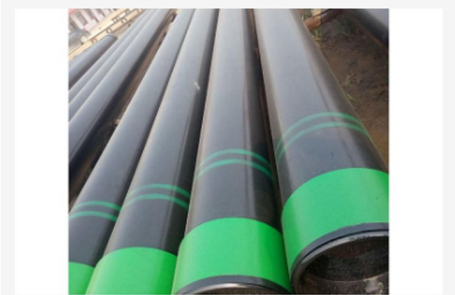

OCTG Casing and Tubing



Mechanical Tube

It is used for machine,automobile and other mechanical accessory...



Mechanical seamless pipe

It is used for machine,automobile and other mechanical accessory...



Seamless Steel Pipe for fluid

For conveying oil,gas and other fluid.



3PP coating

DIN30678 standard technical specification for polypropylene...




3LPE coating pipe

Three layer polyethylene anticorrosion is one of the main technical system ...



Galvanized steel pipe

Galvanized steel pipe features a protective zinc coating that helps...

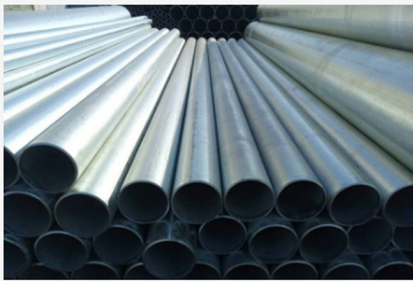

Galvanized steel pipe

Galvanized steel pipe features a protective zinc coating that helps...



3LPE coating pipe

Three layer polyethylene anticorrosion is one of the main technical system ...




Galvanized steel pipe

Galvanized steel pipe features a protective zinc coating that helps...



3PP

DIN30678 standard technical specification for polypropylene...

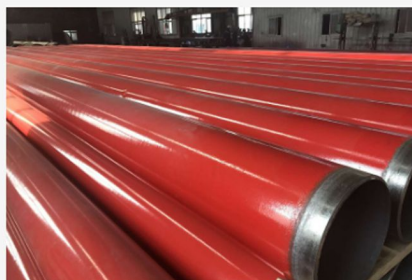

FBE

FBE coating pipe is Fusion Bonded Epoxy coating steel pipe. It is an...



Liquid Epoxy coating

We specialized in the pipe anti-corrosion field, the products cover th...



FLOW CONTROL USA

Manufacturing Process



Billet inspection

Acid washing, cleaning

Cutting

Visual inspection

Scraping




Visual re-inspection

Centering

Heating

Piercing



Pipe rolling

Sizing

Cooling

Reheating



Stretch reducing

Cooling

Straightening

Ends cutting



Visual inspection

*Electromagnetic;
eddy current testing*

Drifting

Hydraulic testing



*Weighing and length
measurement*

Marking and packing

*Weighing and
warehousing*

Shipment



Machining pipe

| Standard | Steel grade | Application |
|------------|----------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
| GB/T 8162 | 10, 20, 35, 45, 20Mn, 25Mn, 20Mn2, 45Mn2, 27SiMn, Q345A, Q345B, Q345C, Q345D, Q345E | Using for manufacturing pipeline, container, equipment, fitting and steel structure. |
| EN 10297-1 | E355, E470 | |
| EN 10210-1 | S235JRH, S275J0H, S275J2H, S355J0H, S355J2H, S355k2H | |
| DIN 1629 | St37.0, St44.0, St52.0 | |
| ASTM A519 | 1026, 1045, 4140 | |

Other steel tube

| Name | Standard | Grade | Application | Size |
|-----------------------------------------------------------|-------------------------------------------------|---------------------------------------------------------|------------------------------------------------------------------------|-----------------|
| Drill pipe | API SPEC 5DP | E, X, G, S | Use for drilling well | 15mm - 168mm |
| Seamless steel pipe used for fluid transportation | GB/T 8163 ASTM A53 ASTM A106 | 10, 20, Q345A, Q345B, Q345C, Q345D, Q345E A, B, C | Use for transferring oil, gas and other fluid | 15mm till 600mm |
| Seamless steel pipe used for shipbuilding | GB/T 5312, Classification society specification | 320, 360, 410 460, 490 | Use for manufacturing Marine boiler, superheater and pressure pipeline | 15mm till 600mm |
| Seamless steel pipe used for hydraulic prop | GB/T 17396 | 20, 35, 40, 27SiMn | Use for support and prop of hydraulic clinder | 15mm till 400mm |
| Seamless steel pipe used for automobile semi-axle housing | YB/T 5035 | 45, 45Mn2 | Used for automobile axle, axle housing | 15mm till 400mm |
| Seamless steel pipe used for drilling | GB/T 9808 | ZT380, ZT490, ZT520, ZT540, ZT590, ZT640 ZT740 | Used for drilling geological corestone, water well and projects, etc. | 15mm till 400mm |

PIPE DIMENSIONS AND WEIGHTS

Available in commercial and nuclear

U.S./ METRIC

| NOMINAL PIPE SIZE | OD | SCHEDULE DESIGNATIONS | | | WALL THICKNESS | | WEIGHT | | ID | |
|-------------------|----------------|-----------------------|----------|-------------------------|----------------|------|-----------|-----------|-------|--------|
| | | | | | INCH | MM | LBS/ FOOT | KG/ METER | INCH | MM |
| | | INCH MM | INCH MM | ASME | | INCH | MM | FOOT | METER | INCH |
| 1/8 6 | 0.405 10.3 | 10 STD | 40 80 | 105 405 805 | 0.049 | 1.24 | 0.19 | 0.28 | 0.307 | 7.82 |
| | | | | | 0.068 | 1.73 | 0.24 | 0.37 | 0.269 | 6.84 |
| | | | | | 0.095 | 2.41 | 0.31 | 0.47 | 0.215 | 5.84 |
| 1/4 8 | 0.540 13.7 | 10 STD | 40 80 | 105 405 805 | 0.065 | 1.65 | 0.33 | 0.49 | 0.410 | 10.40 |
| | | | | | 0.088 | 2.24 | 0.43 | 0.63 | 0.364 | 9.22 |
| | | | | | 0.119 | 3.02 | 0.54 | 0.80 | 0.302 | 7.66 |
| 3/8 10 | 0.675 17.1 | 10 STD | 40 80 | 105 405 805 | 0.065 | 1.65 | 0.42 | 0.63 | 0.545 | 13.80 |
| | | | | | 0.091 | 2.31 | 0.57 | 0.84 | 0.493 | 12.48 |
| | | | | | 0.126 | 3.20 | 0.74 | 1.10 | 0.423 | 10.70 |
| 1/2 15 | 0.840 21.3 | 5 STD | 40 80 | 55 105 405 805 | 0.065 | 1.65 | 0.54 | 0.80 | 0.710 | 18.00 |
| | | | | | 0.083 | 2.11 | 0.67 | 1.00 | 0.674 | 17.08 |
| | | | | | 0.109 | 2.77 | 0.85 | 1.27 | 0.622 | 15.76 |
| 3/4 20 | 1.050 26.7 | 5 STD | 40 80 | 55 105 405 805 | 0.065 | 1.65 | 0.69 | 1.03 | 0.920 | 23.40 |
| | | | | | 0.083 | 2.11 | 0.86 | 1.28 | 0.884 | 22.48 |
| | | | | | 0.113 | 2.87 | 1.13 | 1.69 | 0.824 | 20.96 |
| 1 25 | 1.315 33.4 | 5 STD | 40 80 | 55 105 405 805 | 0.065 | 1.65 | 0.87 | 1.29 | 1.185 | 30.10 |
| | | | | | 0.109 | 2.77 | 1.41 | 2.09 | 1.097 | 27.86 |
| | | | | | 0.133 | 3.38 | 1.68 | 2.50 | 1.049 | 26.64 |
| 1-1/4 32 | 1.660 42.2 | 5 STD | 40 80 | 55 105 405 805 | 0.065 | 1.65 | 1.11 | 1.65 | 1.530 | 38.90 |
| | | | | | 0.109 | 2.77 | 1.81 | 2.69 | 1.442 | 36.66 |
| | | | | | 0.140 | 3.56 | 2.27 | 3.39 | 1.380 | 35.08 |
| 1-1/2 40 | 1.900 48.3 | 5 STD | 40 80 | 55 105 405 805 | 0.065 | 1.65 | 1.28 | 1.90 | 1.770 | 45.00 |
| | | | | | 0.109 | 2.77 | 2.09 | 3.11 | 1.682 | 42.76 |
| | | | | | 0.145 | 3.68 | 2.72 | 4.05 | 1.610 | 40.94 |
| 2 50 | 2.375 60.3 | 5 STD | 40 80 | 55 105 405 805 | 0.065 | 1.65 | 1.61 | 2.39 | 2.245 | 57.00 |
| | | | | | 0.109 | 2.77 | 2.64 | 3.93 | 2.157 | 54.76 |
| | | | | | 0.154 | 3.91 | 3.66 | 5.44 | 2.067 | 52.48 |
| 2-1/2 65 | 2.875 73.0 | 5 STD | 40 80 | 55 105 405 805 | 0.083 | 2.11 | 2.48 | 3.69 | 2.709 | 68.78 |
| | | | | | 0.120 | 3.05 | 3.53 | 5.26 | 2.635 | 66.90 |
| | | | | | 0.203 | 5.16 | 5.80 | 8.63 | 2.469 | 62.68 |
| 3 80 | 3.500 88.9 | 5 STD | 40 80 | 55 105 405 805 | 0.083 | 2.11 | 3.03 | 4.52 | 3.334 | 84.68 |
| | | | | | 0.120 | 3.05 | 4.34 | 6.46 | 3.260 | 82.80 |
| | | | | | 0.216 | 5.49 | 7.58 | 11.29 | 3.068 | 77.92 |
| 3-1/2 90 | 4.000 101.6 | 5 STD | 40 80 | 55 105 405 805 | 0.083 | 2.11 | 3.48 | 5.18 | 3.834 | 97.38 |
| | | | | | 0.120 | 3.05 | 4.98 | 7.41 | 3.760 | 95.50 |
| | | | | | 0.226 | 5.74 | 9.12 | 13.57 | 3.548 | 90.12 |
| 4 100 | 4.500 114.3 | 5 STD | 40 80 | 55 105 405 805 | 0.083 | 2.11 | 3.92 | 5.84 | 4.334 | 110.08 |
| | | | | | 0.120 | 3.05 | 5.62 | 8.37 | 4.260 | 108.20 |
| | | | | | 0.156 | 3.96 | 7.24 | 10.78 | 4.188 | 106.38 |
| 4-1/2 115 | 5.000 127.0 | 5 STD | 40 80 | 55 105 405 805 | 0.083 | 2.11 | 4.38 | 6.46 | 4.834 | 124.08 |
| | | | | | 0.120 | 3.05 | 6.28 | 9.12 | 4.760 | 122.20 |
| | | | | | 0.226 | 5.74 | 9.12 | 13.57 | 4.548 | 120.12 |

| NOMINAL PIPE SIZE | OD | SCHEDULE DESIGNATIONS | | | WALL THICKNESS | | WEIGHT | | ID | |
|-------------------|-----------------|-----------------------|----------|-------------------------|----------------|------|-----------|-----------|--------|--------|
| | | | | | INCH | MM | LBS/ FOOT | KG/ METER | INCH | MM |
| | | INCH MM | INCH MM | ASME | | INCH | MM | FOOT | METER | INCH |
| 5 125 | 5.563 141.3 | 5 10 STD | 40 80 | 55 105 405 805 | 0.109 | 2.77 | 6.36 | 9.46 | 5.345 | 135.76 |
| | | | | | 0.134 | 3.40 | 7.78 | 11.56 | 5.295 | 134.50 |
| | | | | | 0.258 | 6.55 | 14.63 | 21.77 | 5.047 | 128.20 |
| 6 150 | 6.625 168.3 | 5 10 STD | 40 80 | 55 105 405 805 | 0.109 | 2.77 | 7.59 | 11.31 | 6.407 | 162.76 |
| | | | | | 0.134 | 3.40 | 9.30 | 13.83 | 6.357 | 161.50 |
| | | | | | 0.188 | 4.78 | 12.94 | 19.28 | 6.249 | 158.74 |
| 7 175 | 7.625 193.7 | 5 10 STD | 40 80 | 55 105 405 805 | 0.109 | 2.77 | 9.92 | 14.78 | 8.407 | 213.56 |
| | | | | | 0.148 | 3.76 | 13.41 | 19.97 | 8.329 | 211.58 |
| | | | | | 0.250 | 6.35 | 22.38 | 33.32 | 8.125 | 206.40 |
| 8 200 | 8.625 219.1 | 5 10 STD | 40 80 | 55 105 405 805 | 0.109 | 2.77 | 13.41 | 19.97 | 10.125 | 256.40 |
| | | | | | 0.148 | 3.76 | 17.99 | 28.26 | 10.020 | 254.46 |
| | | | | | 0.250 | 6.35 | 28.06 | 41.76 | 10.250 | 260.30 |
| 9 225 | 9.625 244.5 | 5 10 STD | 40 80 | 55 105 405 805 | 0.109 | 2.77 | 17.99 | 28.26 | 12.250 | 311.10 |
| | | | | | 0.148 | 3.76 | 24.42 | 36.82 | 12.000 | 304.74 |
| | | | | | 0.250 | 6.35 | 35.67 | 53.09 | 11.938 | 303.18 |
| 10 250 | 10.750 273.0 | 5 10 STD | 40 80 | 55 105 405 805 | 0.109 | 2.77 | 24.42 | 36.82 | 14.250 | 366.30 |
| | | | | | 0.148 | 3.76 | 32.26 | 47.52 | 14.000 | 359.84 |
| | | | | | 0.250 | 6.35 | 44.99 | 65.48 | 13.938 | 356.54 |
| 11 275 | 11.750 298.5 | 5 10 STD | 40 80 | 55 105 405 805 | 0.109 | 2.77 | 32.26 | 47.52 | 16.250 | 421.50 |
| | | | | | 0.148 | 3.76 | 42.42 | 61.91 | 16.000 | 415.04 |
| | | | | | 0.250 | 6.35 | 56.49 | 81.66 | 15.938 | 411.78 |
| 12 300 | 12.750 323.8 | 5 10 STD | 40 80 | 55 105 405 805 | 0.109 | 2.77 | 42.42 | 61.91 | 18.250 | 476.50 |
| | | | | | 0.148 | 3.76 | 55.99 | 80.66 | 18.000 | 469.04 |
| | | | | | 0.250 | 6.35 | 74.99 | 108.66 | 17.938 | 465.78 |
| 14 350 | 14.000 355.6 | 5 10 STD | 40 80 | 55 105 405 805 | 0.109 | 2.77 | 55.99 | 80.66 | 20.250 | 531.50 |
| | | | | | 0.148 | 3.76 | 74.99 | 108.66 | 20.000 | 524.04 |
| | | | | | 0.250 | 6.35 | 100.66 | 145.66 | 19.938 | 520.78 |

| NOMINAL PIPE SIZE | OD | SCHEDULE DESIGNATIONS | | WALL THICKNESS | | WEIGHT | | ID | | | |
|-------------------|-----------------|-----------------------|---------------|----------------|--------|----------|----------|--------|--------|--------|--------|
| | | | | INCH | MM | LBS/FOOT | KG/METER | INCH | MM | | |
| INCH MM | INCH MM | ASME | | INCH | MM | LBS/FOOT | KG/METER | INCH | MM | | |
| 16 400 | 16.000 406.4 | 10 | 10S | 0.188 | 4.78 | 31.78 | 47.34 | 15.624 | 396.84 | | |
| | | | | 0.250 | 6.35 | 42.09 | 62.65 | 15.500 | 393.70 | | |
| | | 20 | 10S | 0.312 | 7.92 | 52.32 | 77.83 | 15.376 | 390.56 | | |
| | | | | 0.375 | 9.53 | 62.64 | 93.27 | 15.250 | 387.34 | | |
| | | STD | 30 40S | 0.375 | 9.53 | 70.65 | 105.17 | 17.250 | 437.94 | | |
| | | | | 0.438 | 11.13 | 82.23 | 122.38 | 17.124 | 434.74 | | |
| | | XS | 40 80S | 0.500 | 12.70 | 93.54 | 139.16 | 17.000 | 431.60 | | |
| | | | | 0.562 | 14.27 | 104.76 | 155.81 | 16.876 | 428.46 | | |
| | | 60 | 10S | 0.656 | 16.66 | 107.60 | 160.13 | 14.688 | 373.08 | | |
| | | 80 | 10S | 0.844 | 21.44 | 136.74 | 203.54 | 14.312 | 363.52 | | |
| | | 100 | 10S | 1.031 | 26.19 | 164.98 | 245.57 | 13.938 | 354.02 | | |
| | | 120 | 10S | 1.219 | 30.96 | 192.61 | 286.66 | 13.562 | 344.48 | | |
| | | 140 | 10S | 1.438 | 36.53 | 223.85 | 333.21 | 13.124 | 333.34 | | |
| | | 160 | 10S | 1.594 | 40.49 | 245.48 | 365.38 | 12.812 | 325.42 | | |
| 18 450 | 18.000 457 | 10 | 10S | 0.188 | 4.78 | 35.80 | 53.31 | 17.624 | 447.44 | | |
| | | | | 0.250 | 6.35 | 47.44 | 70.57 | 17.500 | 444.30 | | |
| | | 20 | 10S | 0.312 | 7.92 | 58.99 | 87.71 | 17.376 | 441.16 | | |
| | | | | 0.375 | 9.53 | 70.65 | 105.17 | 17.250 | 437.94 | | |
| | | STD | 40S | 0.375 | 9.53 | 70.65 | 105.17 | 17.250 | 437.94 | | |
| | | | | 0.438 | 11.13 | 82.23 | 122.38 | 17.124 | 434.74 | | |
| | | XS | 80S | 0.500 | 12.70 | 93.54 | 139.16 | 17.000 | 431.60 | | |
| | | | | 0.562 | 14.27 | 104.76 | 155.81 | 16.876 | 428.46 | | |
| | | 60 | 10S | 0.750 | 19.05 | 138.30 | 205.75 | 16.500 | 418.90 | | |
| | | 80 | 10S | 0.938 | 23.83 | 171.08 | 254.57 | 16.124 | 409.34 | | |
| | | 100 | 10S | 1.156 | 29.36 | 208.15 | 309.64 | 15.688 | 398.28 | | |
| | | 120 | 10S | 1.375 | 34.93 | 244.37 | 363.58 | 15.250 | 387.14 | | |
| | | 140 | 10S | 1.562 | 39.67 | 274.48 | 408.28 | 14.876 | 377.66 | | |
| | | 160 | 10S | 1.781 | 45.24 | 308.79 | 459.39 | 14.438 | 366.52 | | |
| 20 500 | 20.000 508 | 10 | 10S | 0.218 | 5.54 | 46.10 | 68.61 | 19.564 | 496.92 | | |
| | | | | 0.250 | 6.35 | 52.78 | 78.56 | 19.500 | 495.30 | | |
| | | STD | 20 40S | 0.375 | 9.53 | 78.67 | 117.15 | 19.250 | 488.94 | | |
| | | | | 0.500 | 12.70 | 104.23 | 155.13 | 19.000 | 482.60 | | |
| | | XS | 30 80S | 0.594 | 15.09 | 123.23 | 183.43 | 18.812 | 477.82 | | |
| | | | | 0.812 | 20.62 | 166.56 | 247.84 | 18.376 | 466.76 | | |
| | | 60 | 10S | 1.031 | 26.19 | 209.06 | 311.19 | 17.938 | 455.62 | | |
| | | 80 | 10S | 1.281 | 32.54 | 256.34 | 381.55 | 17.438 | 442.92 | | |
| | | 100 | 10S | 1.500 | 38.10 | 296.65 | 441.52 | 17.000 | 431.80 | | |
| | | 120 | 10S | 1.750 | 44.45 | 341.41 | 508.15 | 16.500 | 419.10 | | |
| | | 140 | 10S | 1.969 | 50.01 | 379.53 | 564.85 | 16.062 | 407.98 | | |
| | | 22 550 | 22.000 559 | 10 | 10S | 0.218 | 5.54 | 50.76 | 75.55 | 21.564 | 547.92 |
| | | | | | | 0.250 | 6.35 | 58.13 | 86.55 | 21.500 | 546.30 |
| | | | | STD | 20 40S | 0.375 | 9.53 | 86.69 | 129.14 | 21.250 | 539.94 |
| 0.500 | 12.70 | | | | | 114.92 | 171.10 | 21.000 | 533.60 | | |
| XS | 30 80S | | | 0.875 | 22.23 | 197.60 | 294.27 | 20.250 | 514.54 | | |
| | | | | 1.125 | 28.58 | 251.05 | 373.85 | 19.750 | 501.84 | | |
| 60 | 10S | | | 1.375 | 34.93 | 303.16 | 451.45 | 19.250 | 489.14 | | |
| 80 | 10S | | | 1.625 | 41.28 | 353.94 | 527.05 | 18.750 | 476.44 | | |
| 100 | 10S | | | 1.875 | 47.63 | 403.38 | 600.67 | 18.250 | 463.74 | | |
| 120 | 10S | | | 2.125 | 53.98 | 451.49 | 672.30 | 17.750 | 451.04 | | |

| NOMINAL PIPE SIZE | OD | SCHEDULE DESIGNATIONS | | WALL THICKNESS | | WEIGHT | | ID | | | |
|-------------------|----------------|-----------------------|---------------|----------------|-------|----------|----------|--------|---------|--------|--------|
| | | | | INCH | MM | LBS/FOOT | KG/METER | INCH | MM | | |
| INCH MM | INCH MM | ASME | | INCH | MM | LBS/FOOT | KG/METER | INCH | MM | | |
| 24 600 | 24.000 610 | 10 | 10S | 0.250 | 6.35 | 63.47 | 94.53 | 23.500 | 597.30 | | |
| | | | | 0.375 | 9.53 | 94.71 | 141.12 | 23.250 | 590.94 | | |
| | | STD | 20 40S | 0.500 | 12.70 | 125.61 | 187.07 | 23.000 | 584.60 | | |
| | | | | 0.562 | 14.27 | 140.81 | 209.65 | 22.876 | 581.46 | | |
| | | XS | 80S | 0.688 | 17.48 | 171.45 | 255.43 | 22.624 | 575.04 | | |
| | | | | 0.969 | 24.61 | 238.57 | 355.28 | 22.062 | 560.78 | | |
| | | 60 | 10S | 1.219 | 30.96 | 296.86 | 442.11 | 21.562 | 548.08 | | |
| | | 80 | 10S | 1.531 | 38.89 | 367.74 | 547.74 | 20.938 | 532.22 | | |
| | | 100 | 10S | 1.812 | 46.02 | 429.79 | 640.07 | 20.376 | 517.96 | | |
| | | 120 | 10S | 2.062 | 52.37 | 483.57 | 720.19 | 19.876 | 505.26 | | |
| | | 140 | 10S | 2.344 | 59.54 | 542.64 | 808.27 | 19.312 | 490.92 | | |
| | | 26 650 | 26.000 660 | 10 | 40S | 0.312 | 7.92 | 85.68 | 127.36 | 25.376 | 644.16 |
| | | | | | | 0.375 | 9.53 | 102.72 | 152.88 | 25.250 | 640.94 |
| | | | | STD | 80S | 0.500 | 12.70 | 136.30 | 202.74 | 25.000 | 634.60 |
| 0.312 | 7.92 | | | | | 92.35 | 137.32 | 27.376 | 695.16 | | |
| 28 700 | 28.000 711 | 10 | 40S | 0.375 | 9.53 | 110.74 | 164.86 | 27.250 | 691.94 | | |
| | | | | 0.500 | 12.70 | 146.99 | 218.71 | 27.000 | 685.60 | | |
| | | STD | 20 80S | 0.625 | 15.88 | 182.90 | 272.23 | 26.750 | 679.24 | | |
| | | | | 0.312 | 7.92 | 99.02 | 147.29 | 29.376 | 746.16 | | |
| 30 750 | 30.000 762 | 10 | 40S | 0.375 | 9.53 | 118.76 | 176.85 | 29.250 | 742.94 | | |
| | | | | 0.500 | 12.70 | 157.68 | 234.68 | 29.000 | 736.60 | | |
| | | STD | 20 80S | 0.625 | 15.88 | 196.26 | 292.20 | 28.750 | 730.24 | | |
| | | | | 0.312 | 7.92 | 105.69 | 157.25 | 31.376 | 797.16 | | |
| 32 800 | 32.000 813 | 10 | 80S | 0.375 | 9.53 | 126.78 | 188.83 | 31.250 | 793.94 | | |
| | | | | 0.500 | 12.70 | 168.37 | 250.65 | 31.000 | 787.60 | | |
| | | STD | 20 | 0.625 | 15.88 | 209.62 | 312.17 | 30.750 | 781.24 | | |
| | | | | 0.688 | 17.48 | 230.29 | 342.94 | 30.624 | 778.04 | | |
| 34 850 | 34.000 864 | 10 | 80S | 0.312 | 7.92 | 112.36 | 167.21 | 33.376 | 848.16 | | |
| | | | | 0.375 | 9.53 | 134.79 | 200.82 | 33.250 | 844.94 | | |
| | | STD | 20 | 0.500 | 12.70 | 179.06 | 266.63 | 33.000 | 838.60 | | |
| | | | | 0.625 | 15.88 | 222.99 | 332.14 | 32.750 | 832.24 | | |
| 36 900 | 36.000 914 | 10 | 80S | 0.688 | 17.48 | 245.00 | 364.92 | 32.624 | 829.04 | | |
| | | | | 0.312 | 7.92 | 119.03 | 176.97 | 35.376 | 898.16 | | |
| | | STD | XS | 0.375 | 9.53 | 142.81 | 212.57 | 35.250 | 894.94 | | |
| | | | | 0.500 | 12.70 | 189.75 | 282.29 | 35.000 | 888.60 | | |
| 42 1050 | 42.000 1067 | STD | XS | 0.375 | 9.53 | 166.86 | 248.53 | 41.250 | 1047.94 | | |
| | | | | 0.500 | 12.70 | 221.82 | 330.21 | 41.000 | 1041.60 | | |
| | | STD | XS | 0.625 | 15.88 | 276.44 | 411.64 | 40.750 | 1035.24 | | |
| | | | | 0.750 | 19.05 | 330.72 | 492.33 | 40.500 | 1028.90 | | |
| 48 1200 | 48.000 1219 | STD | XS | 0.375 | 9.53 | 190.92 | 284.25 | 47.250 | 1199.94 | | |
| | | | | 0.500 | 12.70 | 253.89 | 377.81 | 47.000 | 1193.60 | | |

